



OWL RADON BLOCK

One component, polyurethane - bitumen liquid membrane for flashing, waterproofing & protection

DESCRIPTION

OWL RADON® is a quick-curing, one component, thixotropic, bitumen-extended polyurethane fluid. It produces a hydrophobic, elastic membrane with very strong adhesion to most types of substrates, as well as bituminous, and excellent mechanical and chemical resistance properties. It is ideal for application on vertical surfaces: No running, no bubbling.

It is based on pure elastomeric hydrophobic polyurethane resin and is extended with chemically polymerised virgin bitumen. Apply with brush or spatula. Total consumption: 2.0 kg/m² in one or two coats.

RECOMMENDED FOR

Waterproofing and protection of:

- Gypsum and cement boards,
- asphalt membranes (for repair also),
- cementitious substrates,
- roofs,
- light roofing made of metal or fibrous cement,
- basements,
- foundations,
- closed spaces with high humidity.

LIMITATIONS

Not recommended for unsound substrates.

FEATURES & BENEFITS

- Economic
- Thixotropic: Easily applied on vertical surface surfaces and complex shapes without running or bubbling.

- Excellent adhesion on almost any type of surface, with or without the use of special primers.
- Excellent thermal resistance, the product never turns soft. Max service temperature 80 C, max shock temperature 150 oC.
- Resistance in the cold: The film remains elastic even down to -40 oC.
- Outstanding mechanical properties, high elongation, tensile and tear strength, high abrasion resistance.
- Excellent chemical resistance.
- Effective humidity barrier.

APPLICATION PREREQUISITES

In general, **OWL RADON** has excellent adhesion to most types of substrates, as well as bituminous, without the use of primers. Nevertheless, testing before use is strongly advised. Please contact our technical department for further information.

Concrete substrate conditions (standard):

- Hardness: R28 = 15Mpa.
- Humidity: W < 10%.
- Temperature: 5-35 oC.
- Relative humidity: < 85%.

Primer selection for special conditions and substrates:

Although the material has excellent adhesion on most common construction substrates, suitable primers are:

Aquadur: For strong concrete or in cases of damp wet concrete.

Microsealer-Pu: In cases of porous concrete

APPLICATION PROCEDURE

Clean the surface using a high pressure washer, if possible. Remove oil, grease and wax

contaminants. Cement laitance, loose particles, mould release agents, cured membranes must be removed. Fill surface irregularities with the necessary product.

Application:

Apply with brush or spatula or airless spray.

CONSUMPTION

Total consumption: **2 kg/m²** in one or two coats.

CLEANING

Clean tools and equipment first with paper towels and then using SOLVENT-01.

PACKAGING

1 Kg, 5Kg ,20Kg

SHELF LIFE

Can be kept for 6 months minimum in the original unopened pails in dry places and at temperatures of 5-25 C. Once opened, use as soon as possible.

SAFETY INFORMATION

Contains a small quantity of volatile flammable solvents. Apply in well-ventilated, no smoking areas, away from naked flames. In closed spaces use ventilators and carbon active masks. Keep in mind that solvents are heavier than air so they creep on the floor. The MSDS (Material Safety Data Sheet) is available on request.

TECHNICAL SPECIFICATIONS

In liquid form (before application):


~90% dry matter in Xylene.

PROPERTY	UNITS	METHOD	SPECIFICATION
Viscosity (Brookfield)	cP	ASTM D2196-86, @ 25C	15-20.000
Specific weight	gr/cm3	ASTM D1475 / DIN 53217 / ISO 2811, @ 20 C	1.28
Flash point	oC	ASTM D93, closed cup	> 50
Tack free time, @ 77 F (25 C) & 55% RH	hours	-	1.00-2.00
Recoat time	hours	-	6-24

The cured membrane:

PROPERTY	UNITS	METHOD	SPECIFICATION	
Service temperature	oC	-	-40 to 80	
Max. temperature short time(shock)	oC	-	150	
Hardness	Shore A	ASTM D2240 / DIN 53505 / ISO R868	35	
Tensile strength at break @ 23 oC	Kg/cm2 (N/mm2)	ASTM D412 / EN-ISO-527-3	50 (5)	
Percent elongation @ 23 oC	%	ASTM D412 / EN-ISO-527-3	> 400	
Adhesion to concrete	kg/cm2 (N/mm2)	ASTM D4541	Without primer: >0.5 N/mm2 (EOTA minimum requirement)	With primer: >2 N/mm2
Thermal resistance (200 days @ 80 oC)	-	EOTA TR011	passed	
QUV Accelerated Weathering Test (4hr UV, @ 60 oC (UVB-Lamps) & 4hr COND @ 50 oC)	-	ASTM G53	passed (1000 hours)	
Chemical resistance (Sodium Hypochlorite NaOCl 5% 10 days)	-	-	unaffected	
Hydrolysis resistance (Potassium Hydroxide 8% 10 days @ 50 °C)	-	-	unaffected	
H2O absorption (10 days)	-	-	1.5%	

NONE OF OUR PUBLISHED INSTRUCTIONS AND SPECIFICATIONS, IN WRITING OR OTHERWISE, ARE BINDING EITHER IN GENERAL OR WITH RESPECT TO ANY THIRD PARTY RIGHTS, OR DO THEY RELIEVE INTERESTED PARTIES OF THEIR DUTY TO SUBJECT THE PRODUCT TO AN ADEQUATE EXAMINATION OF ITS SUITABILITY. IN NO EVENT WILL ALCHIMICA S.A. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE, WHATSOEVER, RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.

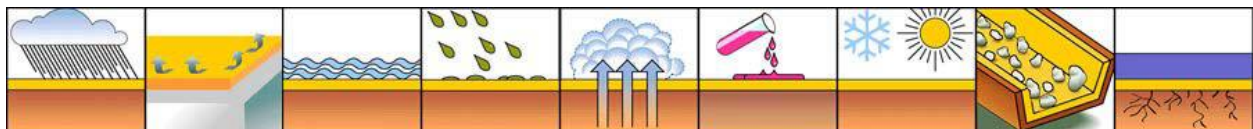



Waterproofing products and systems

OWL's waterproofing range is well known for high quality and long lasting performance.



OWL

THE WISE CHOICE

DURABLE

OWL waterproofing products are long lasting, durable systems that guarantee lasting quality you can count on.

FLEXIBLE

OWL products are very flexible and will expand on contract throughout the year with your surface.

EASY

Apply simply by using a roller, brush, squeegee or sprayer; OWL products are easy to apply without any risk of making mistakes.

FAST

OWL products reduce tedious applications and cut labour costs and time dramatically whilst avoiding risks with sudden rain and cold temperatures.

UNITED KINGDOM OFFICE

Owl Waterproofing
Mabgate Business Centre,
93-99 Mabgate, Leeds LS9 7 DR.
Tel 0845 528 1480
info@owlwaterproofing.co.uk
www.owlwaterproofing.co.uk

IRELAND OFFICE

Owl Waterproofing
The Igoe Building,
135 Slaney Road,
Dublin Industrial Estate,
Glasnevin,
Dublin D11 AW6D
Tel: (01) 830 22 50
info@owlwaterproofing.co.uk
www.owlwaterproofing.co.uk

www.owlwaterproofing.co.uk

